


DIN ISO 8693 (DIN 1530) typ FA, nitridovaný

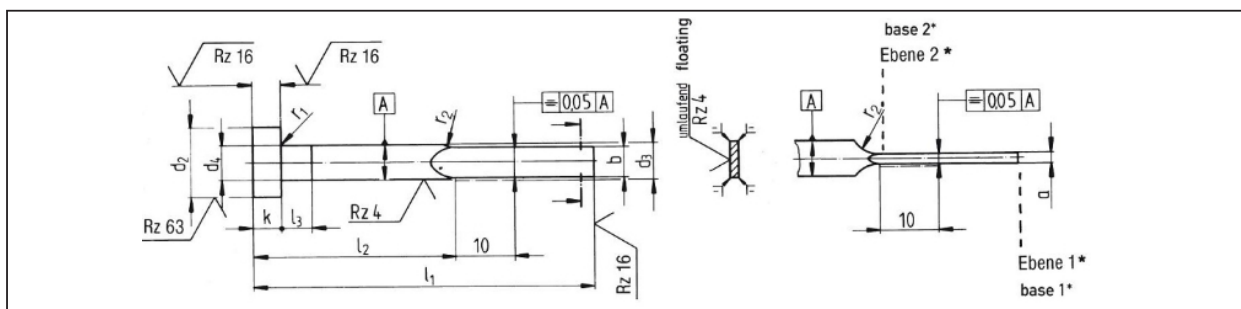

Objednávacie číslo: COM – 6315

Materiál:

Za tepla tvarovaná oceľ

Tvrdosť:

Povrch : najmenej 950 HV 0,3 na povrchu.

Pevnosť jadra : cca. 1400 N / mm²

Hlava : HRC 45 + 10 / - 5

a	b	d ₃	d ₂	k	r ₁	r ₂	l ₁ + 2/0																		
							63	80	100	125	160	200	250	315	400										
0	0	h11	0	0	+ 0,2	min	l ₂ - 1/- 2																		
-0,015	-0,015		-0,2	-0,05	0		30**	40	50	60**	80	100	125	160	200										
***	***					10																			
0,6	1,8	2	4	2	0,2																				
0,6	2,5	3	6	3	0,3																				
0,5	2,8																								
0,6																									
0,7																									
0,8																									
1,0	3,5	4	8	5	0,5																				
0,8							3,8	4,2																	
1,0																									
1,2	4,5	5	10	7	0,8																				
1,0																									
1,2																									
1,5																									
1,0	5,5	6	12	5	0,5																				
1,2																									
1,5	7,5	8	14	7	0,8																				
2,0																									
1,5																									
2,0	9,5	10	16	7	0,8																				
2,0																									
2,5	11,5	12	18	7	0,8																				
2,0																									
2,5																									
2,0	15,5	16	22	7	0,8																				
2,5																									

● = Dostupné veľkosti

☺ Špeciálna výroba na dopyt



COMPREX, s. r. o.
L. Stárka 2870, 911 05 Trenčín

Tel.: 032/7437874
Mail: info@comprex.sk

www.comprex.sk
eshop.comprex.sk